
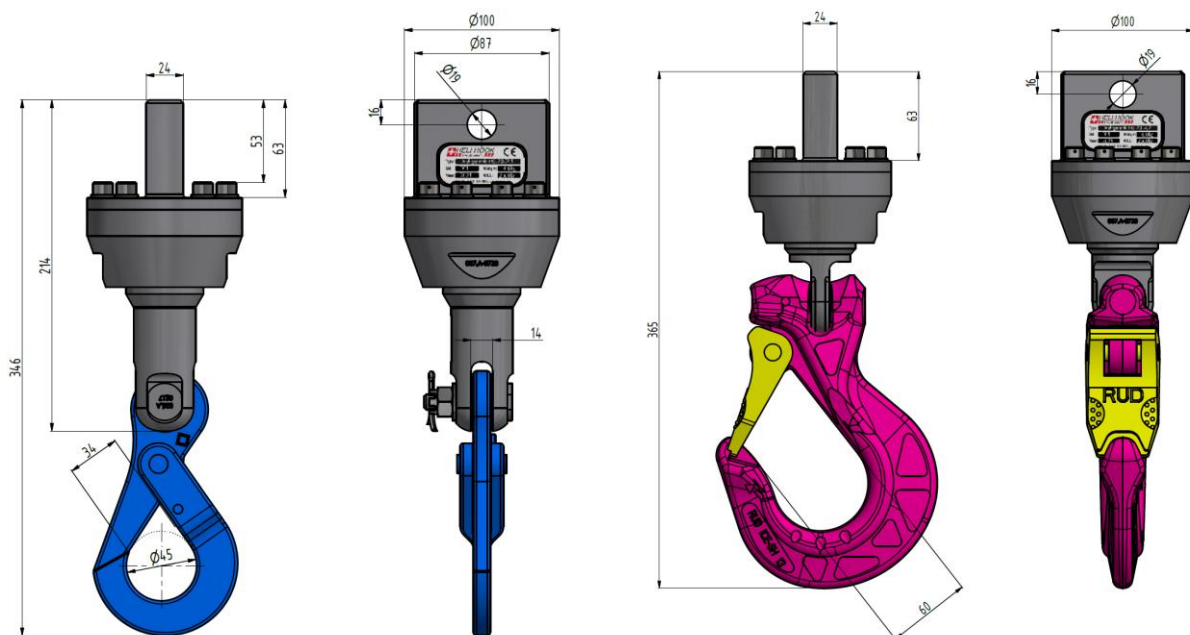


Technical Data Swivel DG.20.201 and DG.20.202

- Quick Connect System for efficient operation
- With a manual hook
- Weight:
 - DG.20.201: 4.6 kg
 - DG.20.202: 8 kg
- Work load limit 2'000 kg
- TBO 2'000 hours
- Radial and axial ball bearing
- Bearings sealed
- Meets the highest safety standards and requirements of directive 2006/42/EG
- Design meets the requirements of Certification Standards CS.27/CS.29 for Rotorcraft by EASA

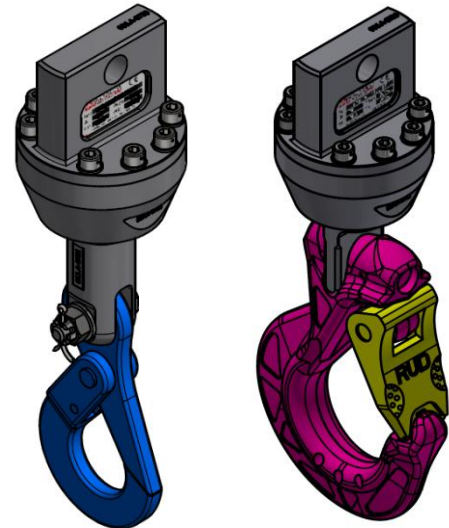


DG.20.201

DG.20.202

Safety hook type CLS/YC

painted

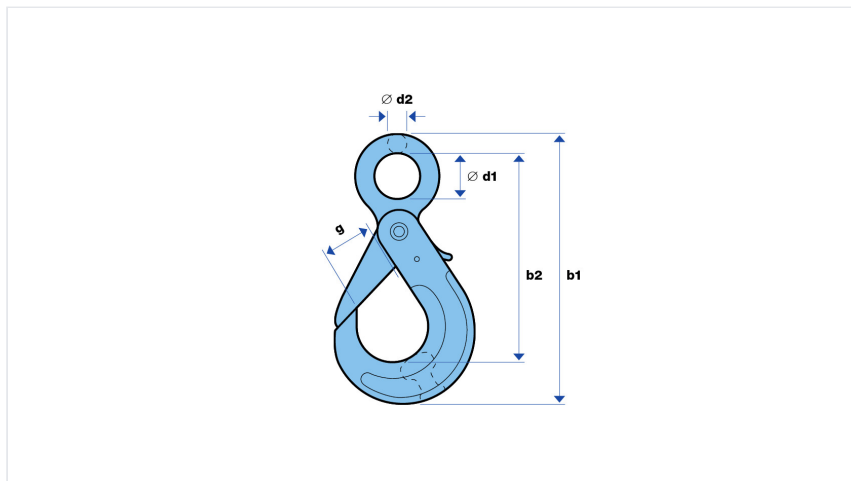

i Drop-forged, safety factor 4, class 10

Other sizes available upon request

No.	b1	b2	g	ø d1	ø d2	WLL kN	kg
30480-0200-10	171	136	34	25	11	25	0,8000

Labeling according to the technical drawing. Technical changes are reserved. The information on this website is provided without guarantee of completeness.

Further informations

Surface:	painted
Weight:	0,8000 kg
Material group:	steel
Nominal strength (Mat. strength):	class 10

Link to the article

<https://www.jakob.com/ch/en/product/safety-hook-type-clsync/8f982d32-abf4-5c8b-b3d1-58afe3264d21#30480-0200-10>

ISH

ICE-STAR hook.



Product features:

- Innovative structured design, finite elements up to 25 % lighter than hooks of grade 8 with the same WLL, i. e. the next largest nominal chain thickness.
- Large jaw opening as with the granite super hook, proven a million times over – the next largest nominal thickness – no skimping!
- Protective edges – on the sides and on top for folding protection.
- Wear occurrence ribs – to protect the first chain link.
- No protruding hook tip (no hooking).
- Thickened hook tip – prevents dangerous hook tip WLL.
- Drop-forged, tempered, ergonomically designed folding safety device and protected, stainless, triple-wound long-term double leg spring. Here the standard values for lateral load capacity are exceeded many times over.

ISH-13

WLL [kg]	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Weight [kg]	Ref. No.
8,000	153	85	52	31	50	56	50	166	4,01	7995256

